








(ENGLISH) Fenix BC15R Bicycle Light

Technical Parameters

ANSI/PLATO FL1	High	Med	Low	Flash
 Output	400 lumens	150 lumens	50 lumens	400/50 lumens
 Runtime	3 hours 40 minutes*	10 hours 30 minutes	31 hours 30 minutes	\
 Distance	78 meters	47 meters	28 meters	\
 Intensity	1504 candela	549 candela	200 candela	\
 Impact Resistance	1 meter			
 Waterproof	IP66			

Note: The above specifications are the test results produced by Fenix through its laboratory testing using the Fenix ARB-L18-2600 battery under the temperature of 21±3°C and humidity of 50% - 80%. The true performance of this product may vary according to different working environments.

*The High output is measured in total of runtime including output at reduced levels due to the built-in temperature protection mechanism.

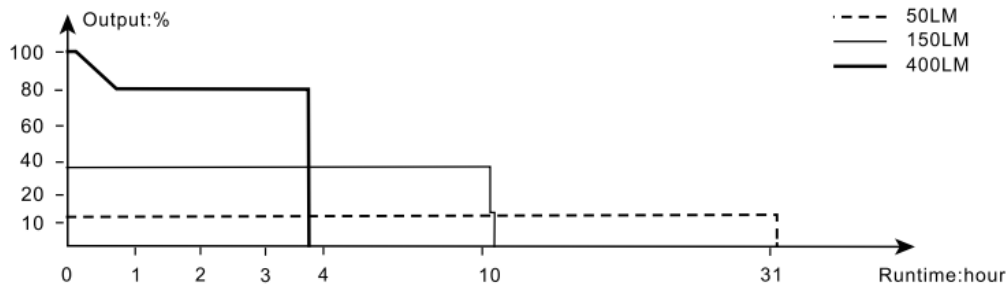

Warning

- Ⓞ DO place this light out of the reach of children!
- Ⓞ Do NOT shine the light directly into the eyes of anyone!
- Ⓞ Do NOT place light head near flammable objects, high temperatures can cause objects to overheat and become flammable/ignite!
- Ⓞ Do NOT use the light in inappropriate ways such as holding the unit in your mouth, doing so could cause serious personal injury or death if the light or internal battery fails!
- Ⓞ This light will accumulate a significant amount of heat while operating, resulting in a high temperature of the light shell. Pay close attention to avoid burns.
- Ⓞ Please turn off the light to prevent accidental activation during storage or transportation.
- Ⓞ The LED of this light is not replaceable; so the whole light will need to be replaced when the LED reaches the end of its lifespan.

Product features

- Ⓞ 400 lumens maximum output and 78 meters maximum beam distance.
- Ⓞ Built-in 2600mAh battery.
- Ⓞ USB Type-C charging.
- Ⓞ Easy and fast operation with a single switch.
- Ⓞ Battery level indication and low-voltage warning.
- Ⓞ Anti-glare cut-off facula line makes urban commuting safer for oncoming persons.
- Ⓞ Compatible with Fenix bicycle light helmet holder and bicycle light holder with GoPro interface.
- Ⓞ IP66 rated protection.

©Size: 4.02" x 1.24" x 1.22"/102 × 31.5 × 31 mm.

©Weight: 3.84 oz/109 g(including battery).

Operating Instructions

On/off

Press and hold the switch for 0.5 seconds to turn/off the light.

Output Selection

With the light switched on, single click the switch to cycle through Low→Med→High.

Flash Mode

With the light switched on, double click the switch to enter Flash mode, single click again to exit flash mode and return to the previously used mode.

Intelligent Memory Circuit

The bicycle light memorizes the last selected output excluding Flash mode. When turned on again the previously used mode will be recalled.

Charging

1. Switch off the light and open the anti-dust cap to reveal the USB Type-C charging port and plug the USB A socket of the charging cable into an electrical outlet, then connect the USB Type-C socket of the charging cable to the light.
2. The indicator will display red while charging and will turn green when fully charged.
3. Once charging is completed, be sure to close the anti-dust cap to maintain the dustproof and waterproof ability.

Note:

1. The normal charging time of the light is approximately 2 hours from depletion to fully charged.
2. Recharge a stored light every four months to maintain the optimum performance of the battery.
3. The Low mode can be operated while charging but the charging time will be prolonged.

Battery Level Indication

With the light switched off, single click the switch to check the battery status, the indicator in the switch will last for 3 seconds.

Green light on: saturated 100% - 85%

Green light flashes: sufficient 85% - 50%

Red light on: poor 50% - 25%

Red light flashes: critical 25% - 1%

Intelligent Overheat Protection

The light will accumulate a lot of heat when used at relatively high modes for extended periods. Therefore it will automatically downshift to a lower brightness level to reduce the temperature to a safe level when this situation occurs. High mode can be reselected if needed.

Low-voltage Warning

When the voltage level drops below the preset level, the bicycle light is programmed to downshift to a lower brightness level until Low output is reached. When this happens in Low output, the battery level indicator constantly blinks red to remind you to recharge the battery till the battery level runs out.

Usage and Maintenance

- ©Disassembling the sealed head can cause damage to the light and will void the warranty.
- ©Recharge the battery in time to ensure normal use for next time.
- ©Recharge a stored light every four months to maintain optimum performance of the battery.
- ©Once charging is completed, be sure to close the anti-dust cover.

Included

Fenix BC15R bicycle light, USB Type-C charging cable, User manual, Information leaflet, Warranty card